

Notice

This manual provides general information, preparation for use, installation and operating instructions for the Black Lion Audio PG-P Type F Power Conditioner.

The information contained in this manual is subject to change without notice. Black Lion Audio makes no warranties of any kind with regard to this manual, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Black Lion Audio shall not be liable for errors contained herein or direct, indirect, special, incidental, or consequential damages in connection with the furnishing, performance, or use of this material.

©2022 Black Lion Audio. The Black Lion Audio 'Lion Face' logo, BLA, PG-P Type F are trademarks or registered trademarks of Black Lion Audio.

This manual and any associated intellectual property are subject to copyright protection. No part of this document may be reproduced in any form without explicit written consent from Black Lion Audio.

RAD Distribution


180 Carpenter Ave.
Middletown, NY 10940

Revised 03-06-25



PG-P Type F

Portable power conditioner and surge protector

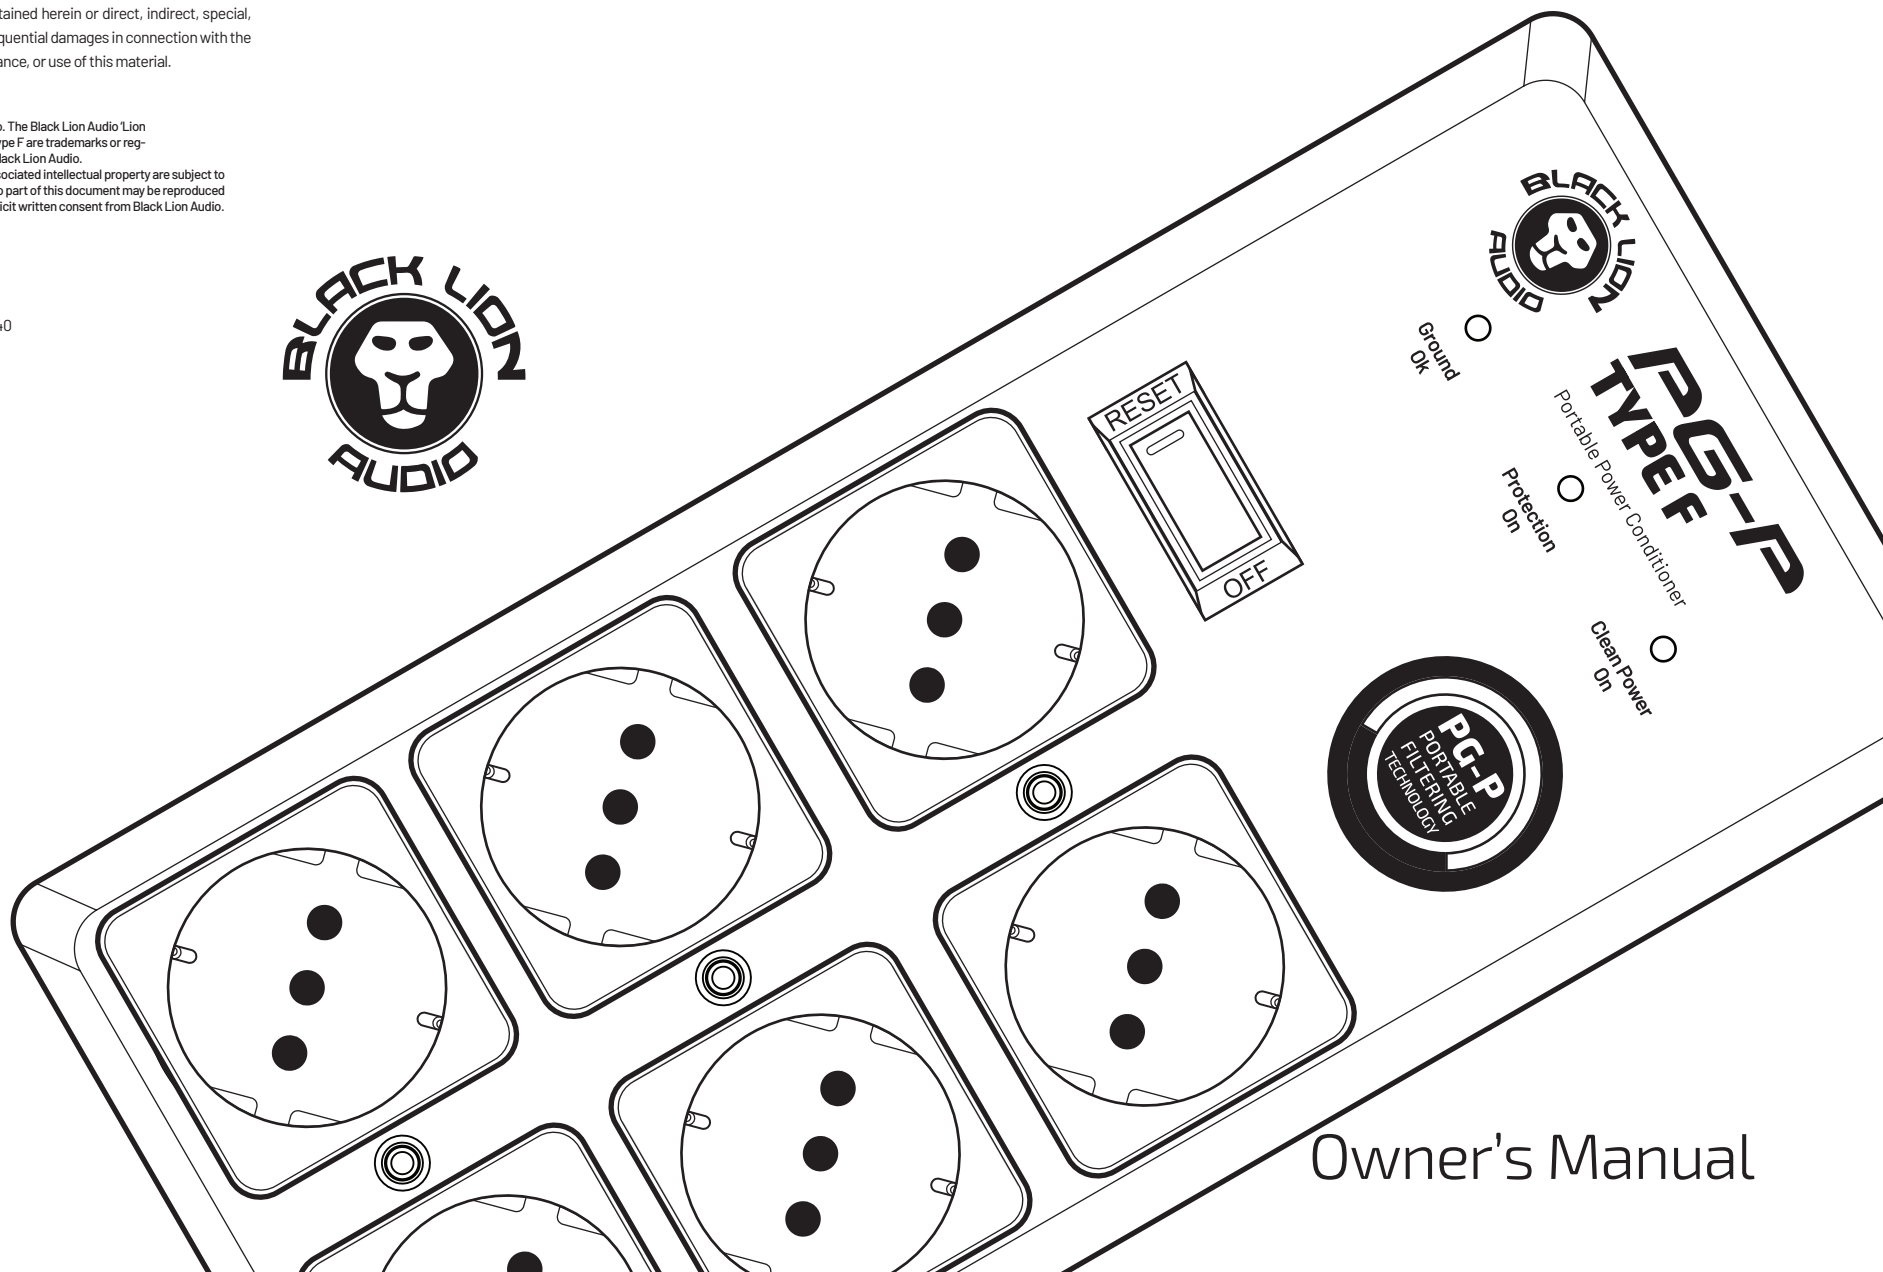

IMPORTANT SAFETY INSTRUCTIONS

- 1. Read these instructions.
- 2. Keep these instructions
- 3. Heed all warnings.
- 4. Follow all instructions.
- 5. Do not use this apparatus near water.
- 6. Clean only with dry cloth.
- 7. Install in accordance with the manufacturer's instructions.
- 8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus that produce heat.
- 9. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus. If the power cord becomes frayed, stop using immediately.
- 10. Use only attachments/accessories specified by the manufacturer
- 11. Use only with a cart, stand, tripod, bracket or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
- 12. Unplug this apparatus during lightning storms or when unused for long periods of time.
- 13. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- 14. This apparatus shall not be exposed to dripping or splashing, and no object filled with liquids, such as vases, shall be placed on the apparatus.
- 15. Note that this apparatus is not completely disconnected from the AC mains service when the power switch is in the OFF position.
- 16. The mains plug or power inlet on the product is used as the disconnect device, so the disconnected device shall remain readily operable when reconnected.
- 17. Any changes or modifications not expressly approved in this manual could void your authority to operate this apparatus.

IMPORTANT!

Please use the correct fuse designated on the rear panel before plugging in the power cord. Improper selection can result in damage to the unit that will not be covered under the warranty.

The lightning flash with an arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.



CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN



CAUTION!
AVIS: RISQUE DE CHOC ELECTRIQUE!
NE PAS OUVRIR.

DO NOT EXPOSE TO RAIN OR MOISTURE. NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO AUTHORIZED PERSONNEL.



The Black Lion Audio PG-P Type F complies with all applicable / RoHS/ WEEE European Union directives.

Do not attempt to service this unit yourself, as it will void your warranty. Please check your unit carefully upon receipt and return to place of purchase immediately if there are any problems with the product. After that, the standard Black Lion Audio 2 YEAR warranty will apply to defects in materials and workmanship.

SERVICE

For service or warranty assistance, please contact the Black Lion Audio distributor in your country through the dealer from whom you purchased this product.

LIMITED 2-YEAR WARRANTY

Black Lion Audio's PG-P Type F is warranted by Black Lion Audio to be free from defects in materials and workmanship for the period of TWO (2) YEARS to the original purchaser. In the event of such defects, the product will be repaired without charge or, at our option, replaced with a new one if delivered to Black Lion Audio prepaid, together with a copy of the sales slip or other proof of purchase date. The warranty excludes problems due to normal wear, abuse, shipping damage or failure to use the product in accordance with the specifications.

All parts and labor are covered under this Limited Warranty. However, if it is determined by Black Lion Audio that the device was damaged or made defective through abuse, we reserve the right to charge the customer for the cost of the repair.

Black Lion Audio shall not be liable for damages based upon inconvenience, loss of use of the product, loss of time, interrupted operation or commercial loss or any other damages, whether incidental, consequential or otherwise. This warranty gives you specific legal rights, and you may have other rights, which will vary from state to state.

This warranty is not transferable.

QUICK START GUIDE

Your PG-P Type F requires an appropriate power source. If you are not sure your source is correct, consult with your local power company.

The AC plug end of your PG-P Type F is intended to be plugged into the power outlet in a specific orientation. This orientation can change depending on the outlet. To verify proper installation, follow these instructions: With the unit powered OFF, insert the AC plug into the power outlet. All LED indicators should remain off until the PG-P Type F's power switch is engaged. If the ground light illuminates prior to engaging the PG-P Type F's power switch - remove the AC plug and rotate it 180 degrees. Next, with the unit still powered OFF, insert the AC plug back into the outlet. All LED indicators should now be appropriately off.

Plug in your equipment to the PG-P Type F.

Turn on the power. The LED indicators will light up to confirm noise filtering, surge protection and ground connection are all in proper order.

Enjoy filtered power!

- 1. **Filtered Outlets:** These outlets employ the PG-P Type F power filtering.
- 2. **ON/OFF Switch:** Once the PG-P Type F is plugged into a grounded 230VAC outlet, turning the POWER switch to the ON position will power the components plugged into all outlets.
- 3. **GROUND OK:** When this is on, the PG-P Type F is plugged into a properly grounded power source. If the LED is not on, unplug the unit from the power source and correct the fault.
- 4. **Protection ON:** When this LED is on, the PG-P Type F's power surge circuitry is functioning correctly. If this LED is OFF, the circuit has malfunctioned. If it is OFF, unplug the unit immediately.
- 5. **Clean Power On:** This LED indicates that the PG-P Type F is providing clean, beautiful AC power to all connected components.
- 6. **Ultra-high Current AC Power Cable:** Integrated high power, heavy duty AC cable to maximize power transfer to high current components such as amplifiers.

SPECIFICATIONS

Voltage	230VAC 10A max
AC Mains Input	Schuko Type F Combination Plugs

